

CLiQFLOW® 681

Rheological Additive

CLiQFLOW 681 is a VOC-, APE and tin-free associative thickener for aqueous systems. The polyurethane thickener improves the viscosity at high shear rates providing an almost Newtonian flow behaviour in pigmented as well as clear systems.

CLiQFLOW 681 is recommended as single- or co-thickener in modern, environmentally friendly high-value paints or coatings. The rheological additive improves levelling behaviour, gloss development, hiding power, brush drag and reduces spattering during roller application.

CLiQFLOW 681 associates with both binders and pigments in an aqueous environment. The association with pigments and extenders also makes the product suitable to produce stable pigment concentrates.


Typical values:

Appearance:	white opaque liquid
Active Content:	ca. 40 %
pH:	ca. 7
Density:	ca. 1.05 g/cm ³

Level of Use / Incorporation:

CLiQFLOW 681 can be added at any production stage. Pre-dilution of the thickener is not required but it might be beneficial in highly reactive coating systems.

The optimum loading level should be determined for each system using a loading ladder study. A level between 0.3 – 2.0% of the total is typically required to achieve the required properties.

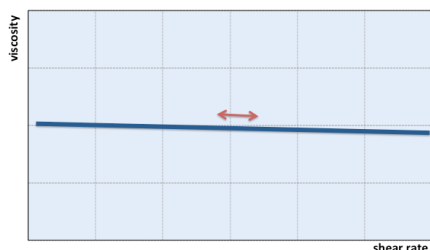

CLiQFLOW 681 performance is not impacted by freezing, although, for ease of handling, it is recommended to store in a cool dry place above 5°C. The minimum shelf life is 24 months when stored in unopened packages.

For information on health and safety information, please consult the Material Safety Data Sheet.

CLiQ SwissTech AG
Bahnhofstrasse 3
7320 Sargans
Switzerland

CLiQ SwissTech (Deutschland) GmbH
Bertram-Blank-Strasse 8A
51427 Bergisch Gladbach
Germany

CLiQ SwissTech (Netherlands) B.V.
Blauwborgje 31
9747AC Groningen
The Netherlands

sample@cliqswiss.com • info@cliqswiss.com

www.cliqswiss.com

This information is based to best of our knowledge and on test results obtained in our laboratory. It is given in good faith and should only regard as recommendations. No warranty is given, and it is advised to all users to evaluate the products carefully for their intended use. Please also consider all further information, labels, and especially the safety data sheet! For further questions, technical service, and samples, please feel free to contact us.