

CLiQFLOW® 675

Rheological Additive


CLiQFLOW 675 is a APE-, biocide- and organotin-free polyurethane based rheological additive for aqueous clear and pigmented systems. The associative thickener increases mid and high shear viscosity and provides a slightly shear thinning flow behaviour to aqueous systems.

CLiQFLOW 675 improves application behaviour, levelling properties and brush drag of aqueous systems. This associative thickener is ideal to improve the overall quality of decorative paint systems thickened with standard cellulosic or acrylic thickeners; but is also suitable for industrial coating systems to improve flow and levelling.

CLiQFLOW 675 is also available in higher concentration with 40 % active.

Typical values:

Appearance:	white opaque liquid
Active Content	ca. 25 %
Brookfield Viscosity:	< 5000 mPas
Density:	ca. 1.05 g/cm ³

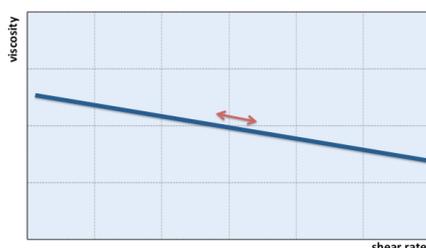

Level of Use / Incorporation:

CLiQFLOW 675 can be added to the aqueous system at any production stage. It does not require a pre-dilution step.

The optimum loading level with **CLiQFLOW 675** should be determined for each system using a loading ladder study. A loading level between 0.2-2.0 % is recommended.

CLiQFLOW 675 shows excellent compatibility with most kind of aqueous binders us used for decorative applications.

CLiQFLOW 675 should be stored in a cool dry place.

For information on health and safety information please consult the Material Safety Data Sheet

CLiQ SwissTech AG
Bahnhofstrasse 3
7320 Sargans
Switzerland

CLiQ SwissTech (Deutschland) GmbH
Bertram-Blank-Strasse 8A
51427 Bergisch Gladbach
Germany

CLiQ SwissTech (Netherlands) B.V.
Blauwborgje 31
9747AC Groningen
The Netherlands

sample@cliqswiss.com · info@cliqswiss.com

www.cliqswiss.com

This information is based to best of our knowledge and on test results obtained in our laboratory. It is given in good faith and should only regard as recommendations. No warranty is given and it is advised to all users to evaluate the products carefully for their intended use. Please consider also all further information, labels, and especially the safety data sheet! For further questions, technical service and samples, please feel free to contact us.

Version: 20-Mar-23